

GENERAL FORK GLOSSARY

DAMPING ADJUSTMENT



R2C2-PCS
High speed & Low speed
Rebound, High speed &
Low speed Compression
adjust (with PCS)



RC2-PCS
Rebound adjust
High speed & Low speed
Compression adjust
(with PCS)



RLRC-PCS
Rebound adjust
Low speed Compression
adjust (with PCS)
Remote Lock out



RC
Rebound adjust
Low speed Compression
adjust



RL-RC
Remote speed Lock out
Rebound adjust
Low speed Compression
adjust



LO-RC
Speed Lock out
Rebound adjust
Low speed Compression
adjust



RL-R
Remote speed Lock out
Rebound adjust



LO-R
Speed Lock out
Rebound adjust



RL
Remote Lock out



LO
Speed Lock out




HLO
Hydraulic Lock out

Application table	R2C2	RC2	RC	RLRC	LORC	RLR	LOR	RL	LO	HLO
RUX	●	●	-	-	-	-	-	-	-	-
DUROLUX	●	●	●	-	-	-	-	-	-	-
AURON	-	●	-	●	●	-	-	-	-	-
AION	-	-	●●	-	-	●	●	-	-	-
ZERON35	-	-	-	-	-	●	●	-	-	-
EPIXON9	-	-	-	-	-	●	●	-	-	-
AXON	-	-	-	●●	●●	●	●	-	-	-
RAIDON	-	-	-	-	-	●	●	-	-	-
XCR	-	-	-	-	-	●	●	●	●	-
XCM	-	-	-	-	-	-	●	●	●	●
XCT	-	-	-	-	-	-	-	-	-	●
XCE	-	-	-	-	-	-	-	-	-	-
M3010	-	-	-	-	-	-	-	-	-	-
MOBIE45/25	-	-	-	-	-	●	●	-	-	-
MOBIE A32	-	-	-	-	-	-	-	●	●	-
NRX	-	-	-	-	-	●	●	●	●	-
NVX	-	-	-	-	-	-	-	●	-	●
NCX	-	-	-	-	-	-	-	●	●	-
NEX	-	-	-	-	-	-	-	●	●	●
CR	-	-	-	-	-	-	-	-	●	●

● PCS cartridge

FEATURES

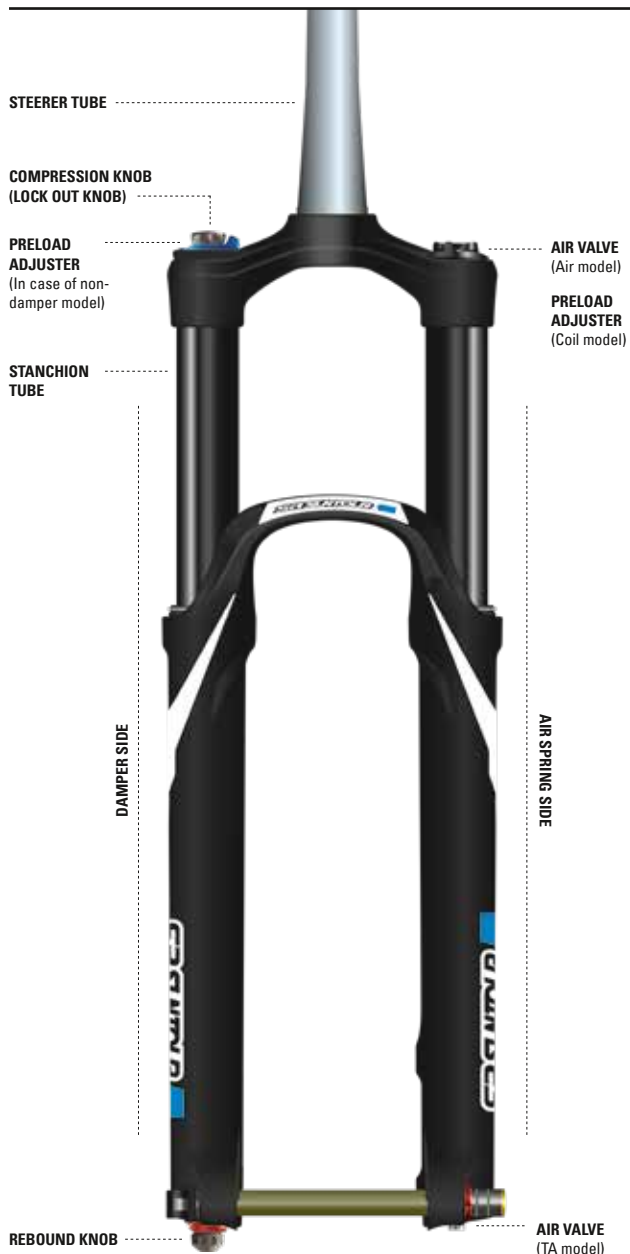

SPRING



AIR
Air spring



COIL, ADJUSTABLE
Coil spring with adjustable preload



COIL
Coil spring

APPLICATION TABLE SPRING	AIR	COIL W/PRELOAD ADJUSTER	COIL
RUX	●	-	-
DUROLUX	●	-	-
AURON	●	-	-
AION	●	-	-
ZERON35	-	●	-
EPIXON9	●	-	-
AXON	●	-	-
RAIDON	●	-	-
XCR	●	●	-
XCM	●	●	-
XCT	-	●	-
XCE	-	●	-
M3010	-	●	●
MOBIE45/25	●	●	-
MOBIEA32	-	●	-
NRX	●	●	-
NVX	-	●	-
NCX	●	●	-
NEX	-	●	-
CR	-	● + MCU w/P	●


MAX. DISC BRAKE ROTOR SIZES

ATTRIBUTED TO STANCHION TUBE DIAMETER


<p>203 mm MAX DISC = 34 mm 35 mm 36 mm 38 mm STANCHION DIAMETER</p>	<p>180 mm MAX DISC = 28 mm 30 mm 32 mm STANCHION DIAMETER</p>	<p>160 mm MAX DISC = 25.4 mm STANCHION DIAMETER</p>
---	---	---

QLOC (THRU AXLE QUICK RELEASE)


Q-LOC is a patented quick release system for thru axles fully deserving of the name "quick". Q-LOC 2 is the logical evolutionary step, guaranteeing 100% compatibility with all kinds of hub axle designs. A simple push and a little twist of the nut enables a quick removal of the axle. Exchanging the axle is as fast as extracting the axle thanks to the patented expander design which smoothly passes the thru axle and latches safely with a reassuring click sound. Safety and speed is crucial when it comes to pressurised wheel changes during a race. Q-LOC2 offers both in a super lightweight axle (Q-LOC2-Ti 70g).




QR (TOOL FREE)
Diameter: 20mm
O.L.D.: 110mm
Weight: 120g




T (TOOL TYPE)
Diameter: 20mm
O.L.D.: 110mm
Weight: 120g




15 AH (TOOL TYPE)
Diameter: 15mm
O.L.D.: 100mm / 110mm
Weight: -



20QLC2
Diameter: 20mm
O.L.D.: 110mm
Weight: 140g



15QLC2 TI / 15QLC2TI-110
Diameter: 15mm
O.L.D.: 100mm / 110mm
Weight: 70g / 72g



15QLC2 / 15QLC2-110
Diameter: 15mm
O.L.D.: 100mm
Weight: 112g



15QLC32 / 15QLC32-110
Diameter: 15mm
O.L.D.: 100mm / 110mm
Weight: 118g / 122g



15QLC32S
Diameter: 15mm
O.L.D.: 100mm
Weight: 108g



REMOVE QLOC




INSERT QLOC




Application table QLC	T	QR	15 AH	20QLC2	20QLC2-110	15QLC2TI	15QLC2	15QLC2-110	15QLC32	15QLC32-110	15QLC2TI-110	15QLC32s
RUX	●	●	-	-	-	-	-	-	-	-	-	-
DUROLUX	-	-	-	●	○	-	-	-	-	-	●	-
AURON	-	-	-	-	-	●	-	-	-	-	●	-
AION	-	-	-	-	-	-	-	-	●	●	-	-
ZERON35	-	-	-	-	-	-	-	-	-	●	-	-
AXON werx	-	-	-	-	-	●	-	-	-	-	●	-
AXON elite	-	-	-	-	-	●	-	-	-	-	●	-
AXON	-	-	-	-	-	○	●	●	●	-	-	-
RAIDON	-	-	-	-	-	-	-	-	●	●	-	-
XCR	-	-	-	-	-	-	-	-	●	●	-	-
XCM	-	-	●	-	-	-	-	-	●	●	-	-
MOBIE45/25	-	-	○	-	-	-	-	-	●	-	-	-
MOBIE A32	-	-	○	-	-	-	-	-	●	-	-	-
NCX	-	-	-	-	-	-	-	-	-	-	-	●
NRX32	-	-	-	-	-	-	-	-	-	-	-	●
NEX-E25	-	-	-	-	-	-	-	-	-	-	-	●

● standard ○ optional


HEAD LAMP MOUNT, HUB DYNAMO CABLE GUIDE, FENDER MOUNT




INTEGRATED TYPE
(on fork crown with smooth cable routing)




INTEGRATED TYPE
(Small)




INTEGRATED TYPE
(Large)
- Discontinued model -




UNIVERSAL MOUNT
(Bolt-on)




HUB DYNAMO CABLE GUIDE
(w/screws *Option)



SHORT FENDER MOUNT



LONG FENDER TYPE
(Disc brake type)




LONG FENDER TYPE
(Disc V-brake)


Application table	LAMP MOUNT				HUB DYNAMO CABLE GUIDE	FENDER MOUNT		
	ON FORK CROWN	LARGE	SMALL	UNIVERSAL		DISC BRAKE	V-BRAKE	SHORT
RUX BOOST	-	-	-	-	-	-	-	●
DUROLUX BOOST	-	-	-	-	-	●	-	●
AURON BOOST	-	-	-	-	-	●	-	●
AION BOOST	-	-	-	-	-	●	-	●
ZERON35 BOOST	-	-	-	-	-	●	-	●
AXON BOOST	-	-	-	-	-	●	-	●
RAIDON BOOST	-	-	-	-	-	●	-	●
XCR BOOST	-	-	-	-	-	●	-	●
XCM BOOST	-	-	-	-	-	●	-	●
XCM ATB	-	-	-	-	-	●	-	-
XCT	-	-	-	●	-	-	-	-
M3010	-	-	-	●	●	-	-	-
NRX	-	-	-	-	-	●	-	-
NVX	-	-	-	●	○	●	-	-
MOBIE45/25	●	-	-	-	-	●	-	-
MOBIE A32	●	-	-	-	-	●	-	-
NCX	-	-	●	-	●	●	-	-
NEX	●	-	●	-	○	●	-	-
CR	-	-	●	●	●	-	●	-

● standard ○ optional


STANCHION




HARD ANODIZED BLACK
A7 / A6000 SERIES
ALUMINUM




HARD ANODIZED GOLD
A7 / A6000 SERIES




NI-PLATING
STKM




CR-PLATING
STKM



1 1/8"-1.5" TAPER
CTS (CONICAL TAPERED STEERER)



1 1/8"
TS



HOLLOW CROWN

SR SUNTOUR HOLLOW

BOTTOM CASE STANDARD COLORS



GLOSS BLACK
(YS728) with white based decal



CARBON BLACK GLOSS
UD Finish (AXON Werx)




MATT BLACK
(YS727) with white based decal




GLOSS WHITE
(YS701) with black based decal

BRAKE TYPE



P (Pivot Type aka. V-Brake)



DS (Disc Brake)

WHEEL SIZE



TIRE CLEARANCE

